

Giants



Giants liquid coolers

Benefits

- Favourable capacity/footprint ratio
- Fitted with high performance turbo fins
- Low noise operation (from 31 dBA)
- Reliable performance, Eurovent certified
- Easy installation and maintenance
- Energy efficient: low total cost of ownership
- Two-year product guarantee

General information and application

Giants series is a wide range of heavy duty V-type liquid coolers for HVAC, refrigeration and various industrial applications such as water/glycol cooling. For industrial applications, liquid coolers are suitable for closed circuit cooling of various process liquids in food, power, process and general industries. Giants liquid coolers provide high capacities at reduced power consumption and a compact footprint.

Refrigerants



Capacity range ($\Delta T=15^\circ\text{K}$, Glycol 34%)

134 up to 1,867 kW

Finned coil

Copper tubing circuit design optimized according to liquid flow. High efficient fins-tube pattern boost the heat transfer performance. Fitted with aluminium turbo-fins. Fin spacing 2.1 mm. The unique coil construction provides protection against vibration and thermal expansion, thanks to the patented SafeTube System.

Casing

Casing, supports and frame are made of corrosion resistant galvanized steel to tailor the product for industrial environments.

Fan motors


High efficiency, low power consumption AC/EC motors are suitable for multiple voltage and frequency power supply, protection class IP 54 according to DIN 40050. Integrated thermo contacts provide reliable protection against thermal overload. Dual fan row, 4 - 18 fans, $\varnothing$ 900 mm with different noise levels.

Design pressure

Design pressure 10 bar. Each heat exchanger is leak tested with dry air.



Dimensions

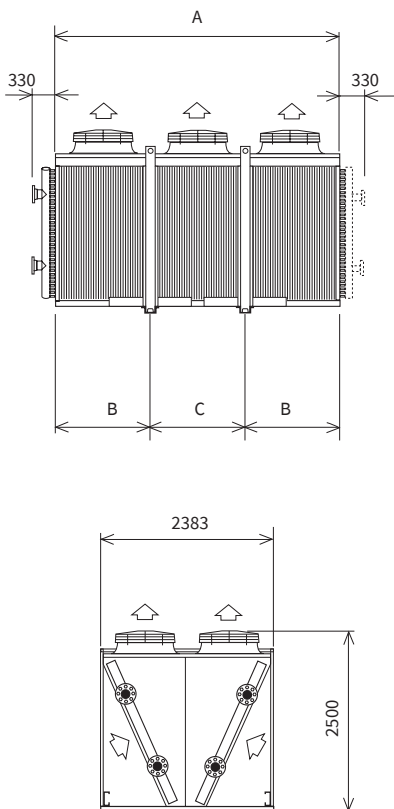

mm	No. motors							
	4	6	8	10	12	14	16	18
A	2844	4266	5688	7110	8532	9954	11376	12798
B	1422	1422	1422	1422	1422	2844	2844	2844
C	-	1422	2844	4266	5688	4266	5688	7110

Certifications

The LU-VE Exchangers quality system is in accordance with ISO 9001. All products are manufactured according to PED regulations.

LU-VE Exchangers participates in the ECP program for HE. Check ongoing validity of certificate:

www.eurovent-certification.com



31772431EN-00

LU-VE Exchangers is a trademark registered and owned by LU-VE Group.
LU-VE Exchangers reserves the right to change specifications without prior notification.

Options

- Fin spacing (3.2 and 4.2 mm)
- Fin material:
 - Alupaint fins: Al-Mg alloy coated fins with a special paint treatment to give strong protection and resistance to corrosion
 - Cu fins
- Coil protection grid
- Flanges
- Fan section division
- Water Spray Evolution system (WSE)
- Anti-vibration pads (TAM)
- Whisperer (WH)
- **Electrical accessories:**
 - Isolating switch (IS)
 - Motors wired to a common terminal box
 - Basic switchboard with fuse protection (ESB)
 - EC switchboard panel with circuit breakers (ECCB)
 - EC fan speed control cabinet (ICM)

Selection

Selection and pricing is to be performed with our air heat exchanger selection software Refriger. Selection output includes all relevant technical data and dimensional drawings.

Code description

EHL	D	F	-	1226	A	(	2	x	3	)	*
1	2			3	4		5		6		7

- 1 Giants liquid coolers (EHL)
- 2 Noise level (F-N=normal, S-X-T=quiet, U-R=residential)
- 3 Model code
- 4 Tube rows code
- 5 No. rows
- 6 No. fans per row
- 7 Options